


## 265 SERIES

60 FULL CELL POLY MODULE

5BB POLY CELL 157MMX157MM

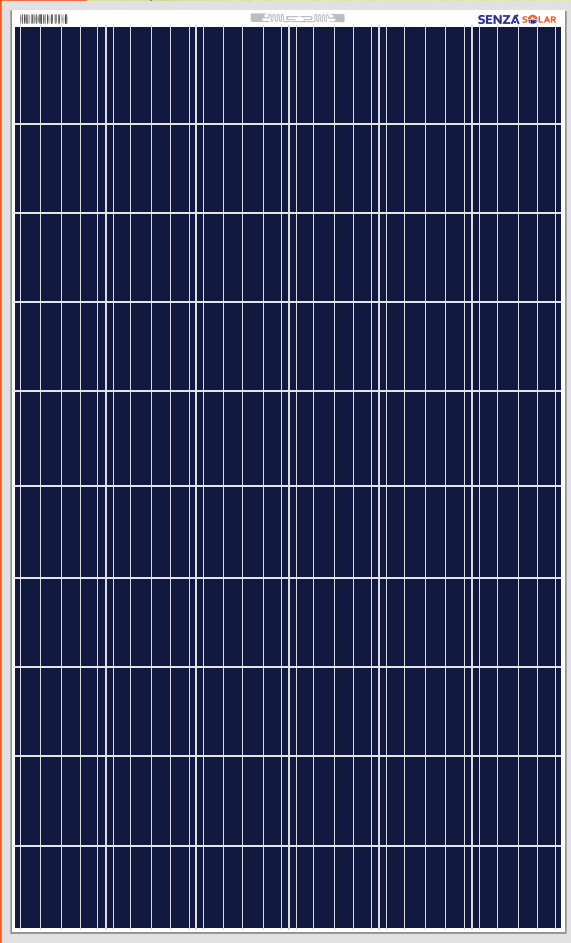

### WHY SENZA SOLAR?



5 Busbar A Grade Solar Cell



PID Resistance



Higher Lifetime Power Yield:



Light-weight design:



Higher power output:




Better low-light performance:

### Trust Senza to Deliver Reliable Performance Over Time


- World-class manufacturer of crystalline silicon photovoltaic modules
- Rigorous quality control meeting the highest international standards: ISO 9001, ISO 14001 and ISO 145001
- Regular independently checked production process from international accredited institute/company
- Tested for harsh environments (IEC 61730 1&2 , 61215 , 61701 , 62804)
- **ALMM** Listed panels
- Long-term reliability tests
- 100% EL inspection ensuring defect-free modules

### 5BB 157mmx157mm Cell



5BB Polycrystalline A+ Grade cell used for a high quality power generation even in low light condition. This Panels are for high temperature weather.

### Industry-leading Warranty based on nominal power

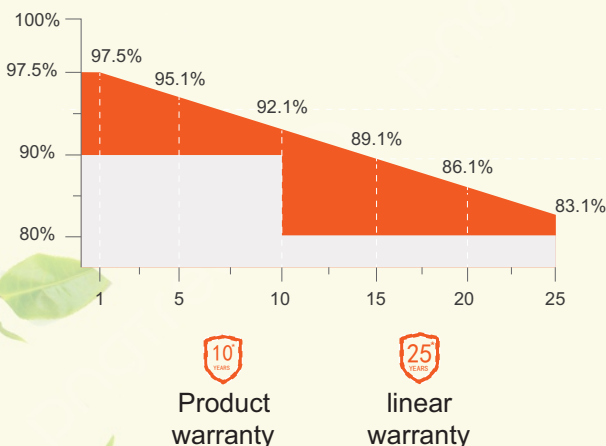

### IP68 Rated Junction Box

# IP68

The IP68 rated junction box ensures an outstanding waterproof level, supports installations in all orientations and reduces stress on the cables.



एन एस आई सी  
NSIC  
ISO 9001:2015



**ALMM**

## Electrical Characteristics

STC	SNS60FP250Wp-SNS60FP270Wp				
Maximum Power at STC (Pmax)	250W	255W	260W	265W	270W
Optimum Operating Voltage (Vmp) V	30.30V	30.72V	31.06V	31.40V	32.46V
Optimum Operating Current (Imp) A	8.25A	8.30A	8.37A	8.44A	8.48A
Open Circuit Voltage (Voc) V	37.08V	37.26V	37.50V	37.68V	38.16V
Short Circuit Current (Isc) A	8.67A	8.78A	8.83A	8.85A	8.96A
Module Efficiency (%)	15.35%	15.66%	15.96%	16.27%	16.58%
Operating Module Temperature °C	-40 °C to +85 °C				
Maximum System Voltage V	1000 V DC				
Maximum Series Fuse Rating A	20 A				
Power Tolerance	Positive				

STC: Irradiance 1000 W/m<sup>2</sup> module temperature 25 °C, AM=1.5;  
Tolerance of Pmax is within +/- 2% ;

NMOT					
Maximum Power at NMOT (Pmax) W	186	189	192	195	198
Optimum Operating Voltage (Vmp) V	25.3	25.5	25.5	25.7	25.9
Optimum Operating Current (Imp) A	6.50	6.54	6.58	6.62	6.65
Open Circuit Voltage (Voc) V	33.2	33.4	33.6	33.8	34.0
Short Circuit Current (Isc) A	6.60	6.68	6.76	6.82	6.88

NMOT: Irradiance 800 W/m<sup>2</sup> ambient temperature 20 °C, AM=1.5, wind speed 1 m/s.

## Temperature Characteristics

Nominal Module Operating Temperature ( NMOT)	47 ± 2 °C
Temperature Coefficient of Pmax	-0.450%/°C
Temperature Coefficient of Voc	-0.350%/°C
Temperature Coefficient of Isc	0.050%/°C

## Mechanical Characteristics




Solar Cell	157mmx157 mm
No. of Cells	60 (6 × 10)
Dimensions	1655x990x35 mm
Weight	19.25 Kg ( Box Packing)
Front Glass	3.2 mm fully tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68 rated (3 bypass diodes)
Output Cables	4.0 mm <sup>2</sup> ,
Connectors	Mc4

## Packing Information

Modules Per Pallet	30 Modules
Total Pallet	22 Pallets
Total Modules	720+ Modules

### Note:

- The specifications in this datasheet are subject to change without any notice.
- The electrical data given here is for reference purpose only.
- Please contact our sales team for any customized solutions.
- Please read safety and installation instructions before using the product.
- Subject to Bahadurgarh Jurisdiction.

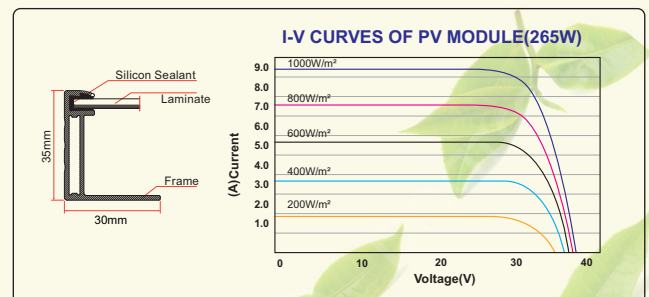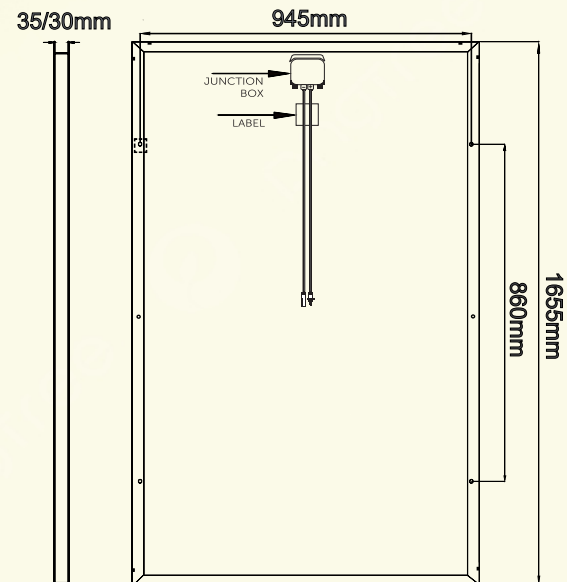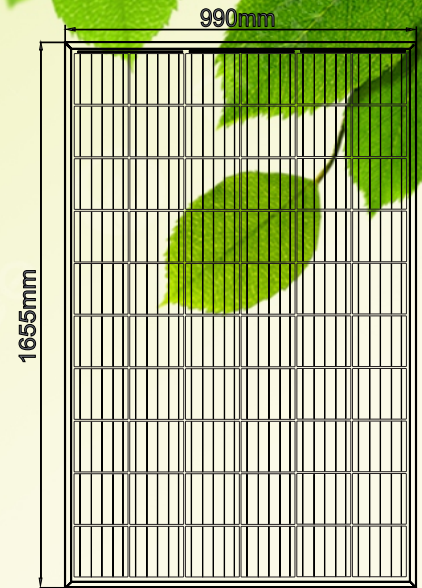

# SENZA<sup>®</sup> SOLAR

Manufacturing: SUN N SAND EXIM INDIA PVT. LTD.

106, HSIIDC Industrial Estate , Sector-16, Bahadurgarh-124507, Distt. Jhajjar(HR)

Phone : 01276-298111 , 1800 120 6635 Website : [www.senzasolar.com](http://www.senzasolar.com)

Email: [info.sns@senzasolar.com](mailto:info.sns@senzasolar.com) , [psirohiya@gmail.com](mailto:psirohiya@gmail.com)