


165 W SERIES

36 FULL CELL POLY MODULE

5BB POLY CELL

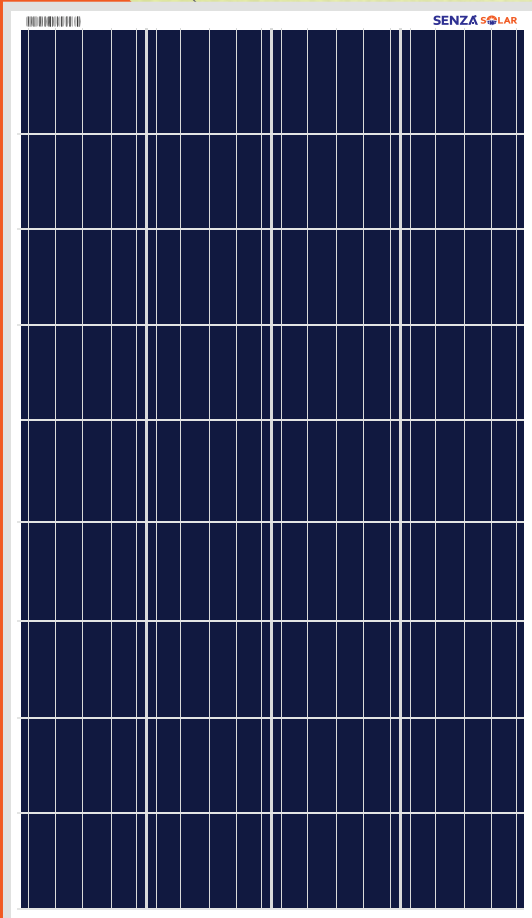

WHY SENZA SOLAR?



5 Busbar A Grade Solar Cell



PID Resistance



Higher Lifetime Power Yield:



Light-weight design:



Higher power output:



Better low-light performance:

Trust Senza to Deliver Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Rigorous quality control meeting the highest international standards: ISO 9001, ISO 14001 and ISO 145001
- Regular independently checked production process from international accredited institute/company
- Tested for harsh environments (IEC 61730 1&2 , 61215 , 61701 , 62804)*


- Long-term reliability tests
- 100% EL inspection ensuring defect-free modules

5BB 157mmx157mm Cell



5BB Polycrystalline A+ Grade cell used for a high quality power generation even in low light condition. This Panels are for high temperature weather.

Industry-leading Warranty based on nominal power

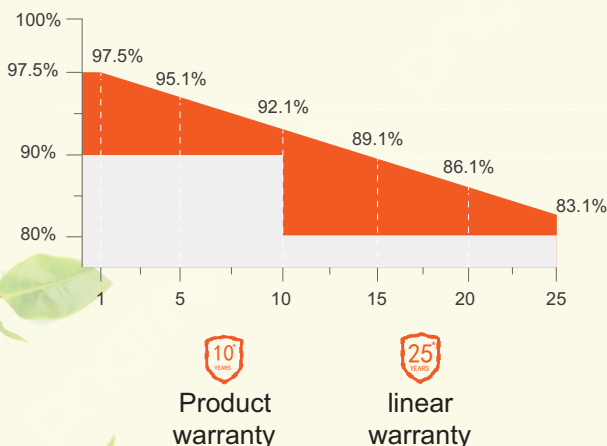

IP68 Rated Junction Box

IP68

The IP68 rated junction box ensures an outstanding waterproof level, supports installations in all orientations and reduces stress on the cables.




ALMM

Electrical Characteristics

STC	SNS36FP150Wp-SNS36FP170Wp				
Maximum Power at STC (Pmax)	150W	155W	160W	165W	170W
Optimum Operating Voltage (Vmp) V	18.18V	18.57V	18.89V	19.21V	19.60
Optimum Operating Current (Imp) A	8.25A	8.36A	8.48A	8.59A	8.67
Open Circuit Voltage (Voc) V	22.25V	22.40V	22.64V	22.88V	23.02
Short Circuit Current (Isc) A	8.67A	8.75A	8.87A	8.98A	9.01
Module Efficiency (%)	15.52%	15.80%	16.15%	16.40%	16.64%
Operating Module Temperature °C	-40 °C to +85 °C				
Maximum System Voltage V	600 V DC				
Maximum Series Fuse Rating A	10 A				
Power Tolerance	Positive				

STC: Irradiance 1000 W/m² module temperature 25 °C, AM=1.5;
Tolerance of Pmax is within +/- 2% ;

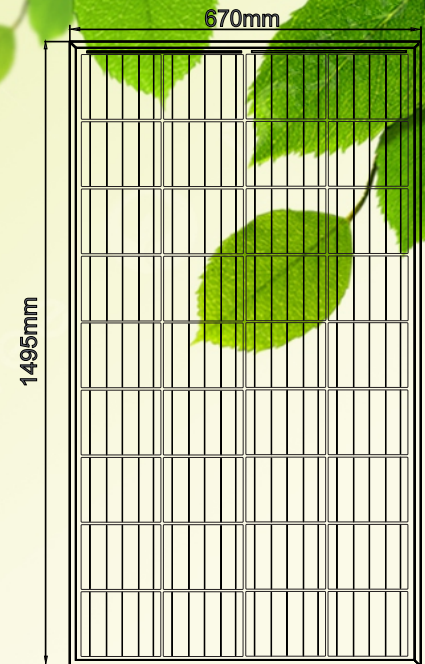


Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	47 ± 2 °C
Temperature Coefficient of Pmax	-0.450%/°C
Temperature Coefficient of Voc	-0.350%/°C
Temperature Coefficient of Isc	0.050%/°C

Mechanical Characteristics

Solar Cell	157mmx157 mm
No. of Cells	36 (4 × 9)
Dimensions	1495x670x35 mm
Weight	12.40 Kg (Box Packing)
Front Glass	3.2 mm fully tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated
Output Cables	N/A
Connectors	N/A

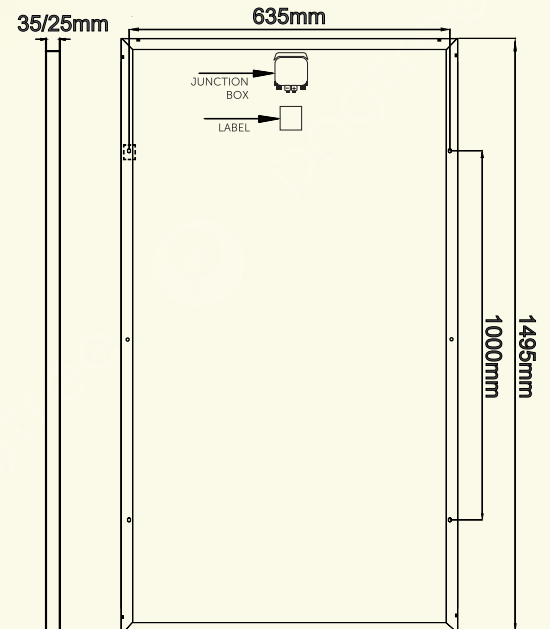


Packing Information

Modules Per Box	2 Modules
Modules Per Pallet	30 Modules

Note:

- The specifications in this datasheet are subject to change without any notice.
- The electrical data given here is for reference purpose only.
- Please contact our sales team for any customized solutions.
- Please read safety and installation instructions before using the product.
- Subject to Bahadurgarh Jurisdiction.

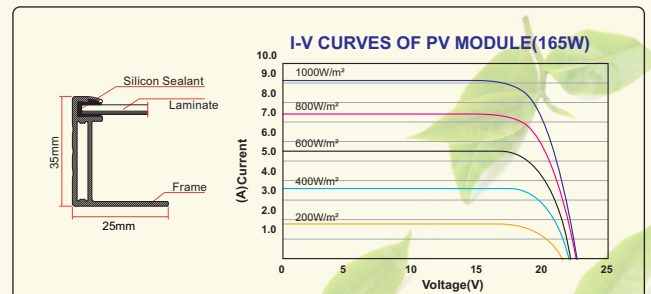

SENZA[®] SOLAR

Manufacturing: SUN N SAND EXIM INDIA PVT. LTD.

106, HSIIDC Industrial Estate , Sector-16, Bahadurgarh-124507, Distt. Jhajjar(HR)

Phone : 01276-298111 , 1800 120 6635 Website : www.senzasolar.com

Email: info.sns@senzasolar.com , psiroyhiya@gmail.com

